


Series DHC

Full Round, Dual Pinch, Enclosed Construction, Hand Wheel Operated

- Clog resistant full round opening.
- Low pressure drop
- No packing
- Drop tight closure
- On/Off or throttling service
- Self cleaning ACME threaded stainless steel stem for easy operation

Specifications:

- Flanges: ANSI STD 125/150 lbs.
- Housing: Cast Iron, ASTM A48, Class 35 (Valve Sizes Up to 10")
Ductile Iron, ASTM A536-80, Class 65-45-12 (Valve Sizes 12" & Up)
- Stem: 303 Stainless Steel
- Guide Rods: 303 Stainless Steel
- Pinch Bars: Ductile Iron, ASTM A536-80, Class 65-45-12
- Bearing: Bronze Alloy

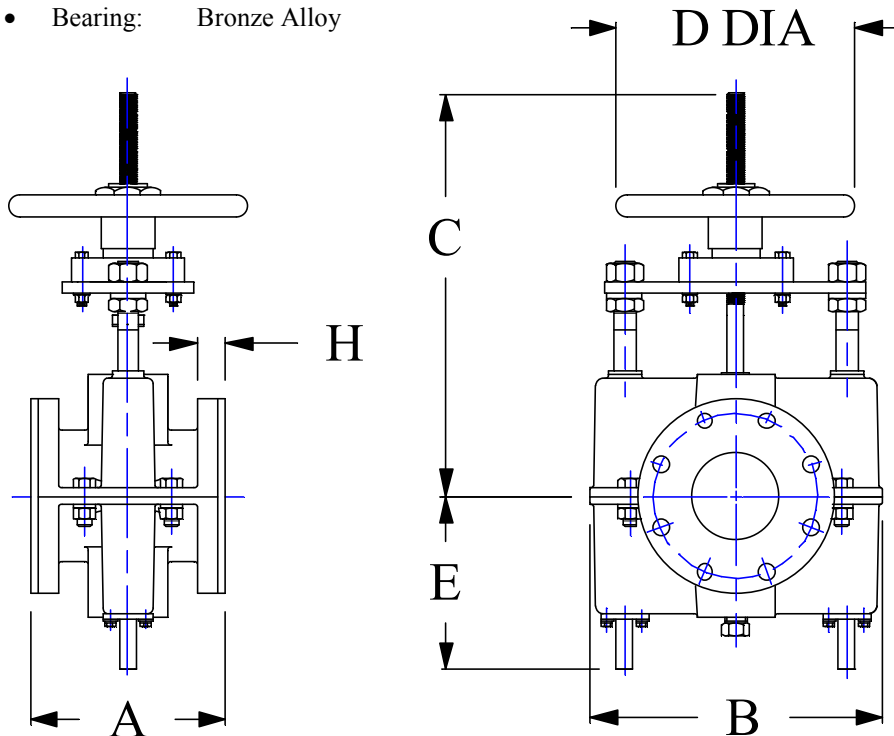

Options:

- Sleeve Elastomer
- Epoxy Paint
- ANSI STD 300 lbs Flange
- 316 Stainless Steel Stem
- Ductile Iron Housing
- Stem Cover Assembly
- Secondary Containment Package
- Limit Switches
- Chain Wheel
- Bevel Gear Box

All dimensions are in inches.

SIZE	1	1-1/2	2	2-1/2	3	4	6, SH.	6, LG.	8	10	12	14	16	18	20	24
A	5.50	6.50	7.00	7.50	8.00	9.00	10.50	17.75	21.37	26.50	29.00	28.00	32.00	36.00	40.00	48.00
B	7.62	7.62	8.50	8.50	11.00	13.50	20.12		22.75	26.25	32.0	34.37	40.50	43.75	50.50	54.00
C Max	11.62	11.62	12.05	12.05	15.00	18.62	24.24		29.68	32.74	41.49	BEVEL GEAR BOX				
D Dia	7.00	7.00	7.00	7.00	8.00	12.00	18.00		22.00			BEVEL GEAR BOX				
E	4.50	4.50	5.25	5.25	6.56	8.00	11.62		14.62	16.68	20.12	22.18	26.50	28.50	32.15	35.00
H	1.03	1.03	1.12	1.12	1.31		1.87		1.62	1.81	2.25	2.75	3.37		3.50	4.00
P Max	200 psi			175 psi			150 psi				100 psi		75 psi			
Wt, lb	15	25	35	40	65	128	250	300	425	560	900	1000	1100	1300	1500	1900

Dimensions are subject to change without notice.